

Clean up with

# Parlor Washdown Hose

By Conewango



## Three-layer construction adds up to one tough washdown hose.


Conewango Parlor Washdown Hose is built to withstand the tough working conditions of today's progressive dairy operations.

- Manufactured in **three layers** for maximum strength and durability
- Rated to perform in a range of temperatures from -50° to 104° F
- Available in six sizes to fit your dairy's needs

*Exterior layer features a ribbed surface to resist abrasion from dragging, hooves, concrete and other hard surfaces*

*Smooth inner PVC layer minimizes friction and withstands high pressures*

*Interior braid fibers are bonded to the inner and outer layers to stand up under water pressures and prolonged UV exposure*

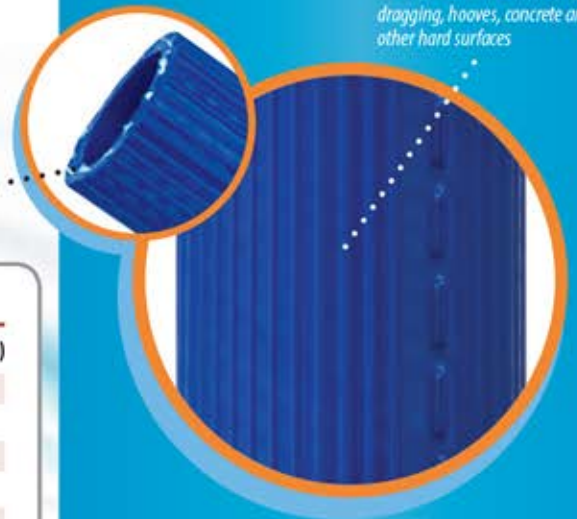

### Sizing for Parlor Washdown Hose

Part Number	ID (in)	ID (mm)	Coil Length (ft)	Max Pressure (PSI)
HUW-219	0.75	19	65	550
HUW-519	0.75	19	196	550
HUW-719	0.75	19	300	550
HUW-225	1.00	25	65	450
HUW-525	1.00	25	196	450
HUW-725	1.00	25	300	450
HUW-232	1.25	32	65	500
HUW-532	1.25	32	196	500
HUW-238	1.50	38	65	600
HUW-538	1.50	38	196	600

For more information on Conewango Parlor Washdown Hose or Clamps, contact your Conewango dealer representative today.

**800.828.9258**  
Conewango.com



### Sizing for Washdown Hose Clamps

Part Number	Size
JNT-519	0.75" (19mm)
JNT-525	1.00" (25mm)
JNT-532	1.25" (32mm)
JNT-538	1.50" (38mm)

**Conewango**  
Serving the Dairyman since 1931